


109 Hook on Sideshift ISO3

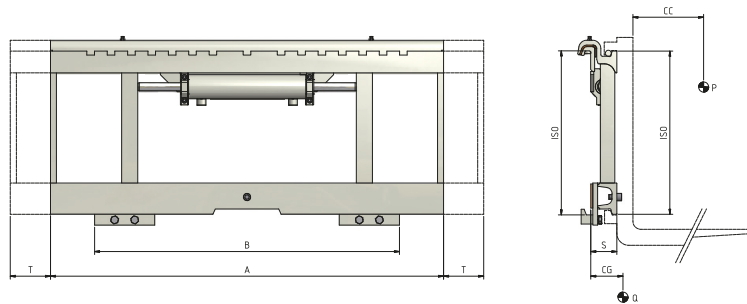

Hydraulic functions: 1 | Max working pressure: 200 Bar

Features:

- Sturdy and long lasting design. • Transverse load displacement. • Fast and accurate lifting and positioning of loads. • Lower risk of damage to goods and pallets.
- Easier manoeuvres, even in confined spaces.

Special Equipment:


- Special widths and/or strokes. • Custom made Forks. • Custom made Load Backrest.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Minimum Fork Carriage	Stroke	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	B (mm)	T (mm)	S (mm)	CG (mm)	Q (kg)
03HLL3C3008	5000	500	3	1150	1000	± 100	75	40	103
03HLL3C3010	5000	500	3	1255	1100	± 100	75	41	110
03HLL3C3014	5000	500	3	1350	1200	± 100	75	42	118
03HLL3C3018	5000	500	3	1560	1540	± 100	75	42	130
03HLL3C3020	5000	500	3	1660	1640	± 100	75	43	137

Oil flow rate

ISO	(L/min)
3	15

↔ Shifting



Please refer to our catalogue for further Special Equipment