


577 Fork Positioner with Integral Sideshift

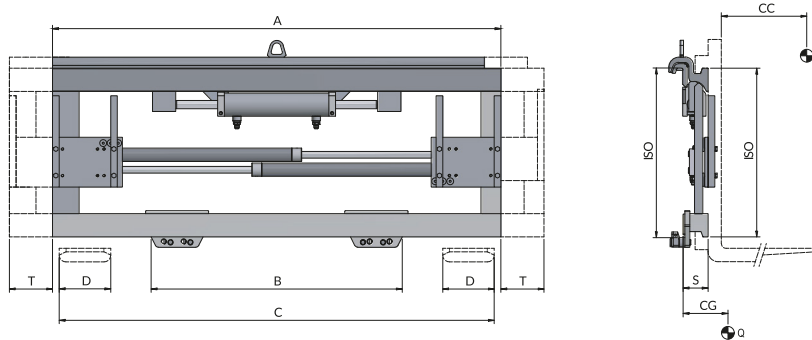

Hydraulic functions: 2 | Max working pressure: 110 Bar

Features:

- Moving housing Cylinders System (ATIB Material Handling Patented) for a constant and synchronised movement of the forks.
- Fast and accurate lifting and positioning of loads.
- Pressure Relief Valve.
- Recommended use of forks with max length 1500 mm.
- Adjustable plates for use of forks with different sections.
- Reduced damage to pallets and goods.
- Easier manoeuvres even in narrow spaces.


Special Equipment:

- Special widths and/or openings.
- Standard Forks.
- Load Backrest.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Minimum Fork Carriage	Opening Range		Fork Width	Stroke	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	B (mm)	C Min (mm)	C Max (mm)	D (mm)	T (mm)	S (mm)	CG (mm)	Q (kg)
18PFA2C2014	2500	500	2	970	920	340	920	130	± 100	62	30	80
18PFA2C2013	2500	500	2	1040	920	340	990	130	± 100	62	32	85
18PFA2C2015	2500	500	2	1150	920	340	1100	130	± 100	62	34	90
18PLL3C2010	5000	500	3	1150	1060	380	1100	150	± 100	75	40	130
18PLL3C2015	5000	500	3	1250	1060	380	1200	150	± 100	75	41	140
18PLL3C2016	5000	500	3	1350	1150	380	1300	150	± 100	75	42	150

Oil flow rate		
ISO	(L/min)	
	↔	↕
2	10	5
3	10	5

↕ Shifting
↕ Opening
↕ Closing



Please refer to our catalogue for further Special Equipment