


## 122 Integral Sideshift

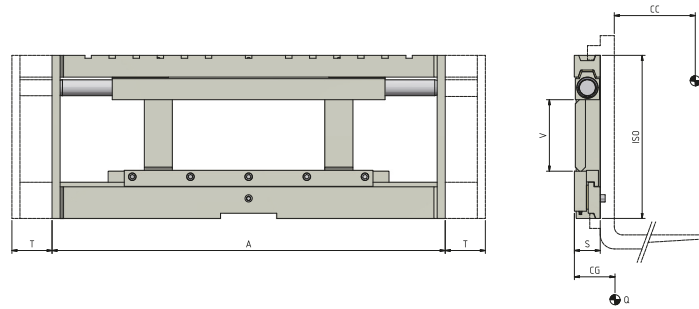

Hydraulic functions: 1 | Max working pressure: 200 Bar

### Features:

- Sturdy and long lasting design. • Transverse load displacement. • Fast and accurate lifting and positioning of loads. • Lower risk of damage to goods and pallets.
- Easier manoeuvres, even in confined spaces.


### Special Equipment:

- Special widths and/or strokes. • Custom made Forks. • Custom made Load Backrest. • Brackets (drawings must be sent to our technical office).

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Visibility	Stroke	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	V (mm)	T (mm)	S (mm)	CG (mm)	Q (kg)
03WFA2C3002	2500	500	2	920	209	± 100	65	34	72
03WFA2C3007	2500	500	2	1020	209	± 100	65	34	80
03WLL3C3002	5000	500	3	1150	265	± 100	75	39	160
03WLL3C3025	5000	500	3	1350	265	± 100	75	39	172
03TR04C3003	6000	600	4	1800	202	± 100	100	62	405
03TR04C3012	6000	600	4	2000	202	± 100	100	62	450
03TR04C5008	8000	600	4	1800	202	± 150	100	62	495
03TR04C5004	8000	600	4	2000	202	± 150	100	62	570

Oil flow rate	
ISO	(L/min)
	↔
2	10
3	15
4	18

↔ Shifting



Please refer to our catalogue for further Special Equipment