


474.IB0 Bale Clamp with wavy edged arms

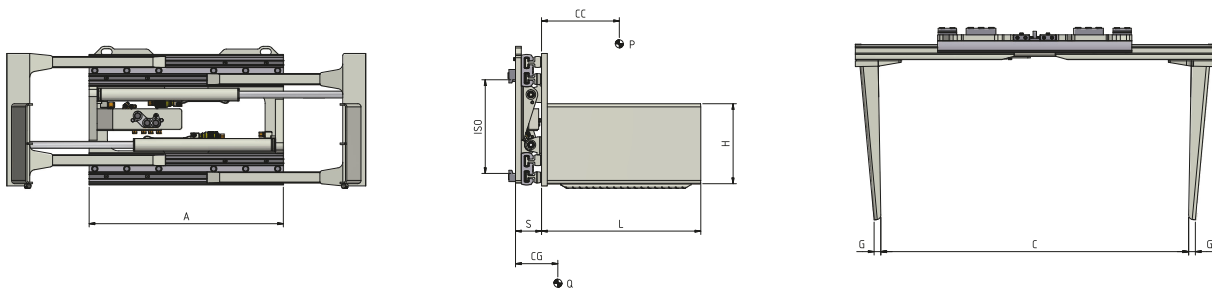

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

• Handling of voluminous loads of any type. • Adjustable clamping force with hydraulic valve. • Pressure Relief Valve. • Non-return Valve. • Regenerative Valve.


Special Equipment:

• Custom made widths/openings. • Custom made Blades. • Load Backrest. • Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Weight
					C Min (mm)	C Max (mm)				
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	Q (kg)
11L08AQ2A0001	1200	500	2	850	300	1340	30x350x900	109	218	254
11L08AQ2A0002	1200	500	2	950	400	1640	30x350x900	109	214	263
11L08AQ2A0003	1200	500	2	1050	500	1940	30x350x900	109	214	270
11L08BE2A0001	1400	500	2	950	320	1470	40x400x1000	137	253	390
11L08BE2A0002	1400	500	2	1050	420	1770	40x400x1000	137	248	406
11L08BE2A0003	1400	500	2	1150	520	2070	40x400x1000	137	242	422
11L08BE2A0004	1400	500	2	1250	420	1970	40x400x1000	137	236	427
11L08CG2A0001	1700	500	2	950	320	1470	40x400x1000	137	253	390
11L08CG2A0002	1700	500	2	1050	420	1770	40x400x1000	137	248	430
11L08D62A0001	1900	500	2	1050	290	1540	40x400x1000	137	251	412
11L08D62A0002	1900	500	2	1150	390	1840	40x400x1000	137	247	426
11L08D62A0003	1900	500	2	1250	490	2140	40x400x1000	137	242	440
11L08D62A0004	1900	500	2	1350	590	2440	40x400x1000	137	238	454
11L08EY3A0001	2400	500	3	1050	290	1540	40x400x1000	137	251	420
11L08EY3A0002	2400	500	3	1150	390	1840	40x400x1000	137	247	426
11L08G03A0001	2700	500	3	1100	410	1780	40x400x1000	157	271	542
11L08G03A0002	2700	500	3	1100	400	1770	40x400x1200	157	334	588
11L08G03A0003	2700	500	3	1200	310	1680	40x400x1200	157	265	568
11L08G03A0004	2700	500	3	1200	300	1670	40x400x1200	157	321	614
11L08G03A0005	2700	500	3	1300	410	1980	40x400x1000	157	259	594
11L08G03A0006	2700	500	3	1300	400	1970	40x400x1200	157	316	640
11L08G03A0007	2700	500	3	1400	510	2280	40x400x1000	157	255	620
11L08G03A0008	2700	500	3	1400	500	2270	40x400x1200	157	310	668
11L08HY3A0001	3500	500	3	1200	300	1710	40x500x1200	167	368	758
11L08HY3A0002	3500	500	3	1200	290	1700	40x500x1500	167	453	855
11L08HY3A0003	3500	500	3	1300	400	2010	40x500x1200	167	361	784
11L08HY3A0004	3500	500	3	1300	390	2000	40x500x1500	167	447	881
11L08HY3A0005	3500	500	3	1400	500	2310	40x500x1200	167	354	810
11L08HY3A0006	3500	500	3	1400	490	2300	40x500x1500	167	438	907

Oil flow rate	
ISO	(L/min)
	→ ←
2	20
3	25

→||← Clamping

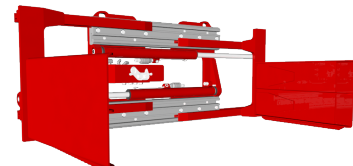

Please refer to our catalogue for further Special Equipment