


598 FS Pin-Type Fork Positioner with Welded Forks and Integral Sideshift

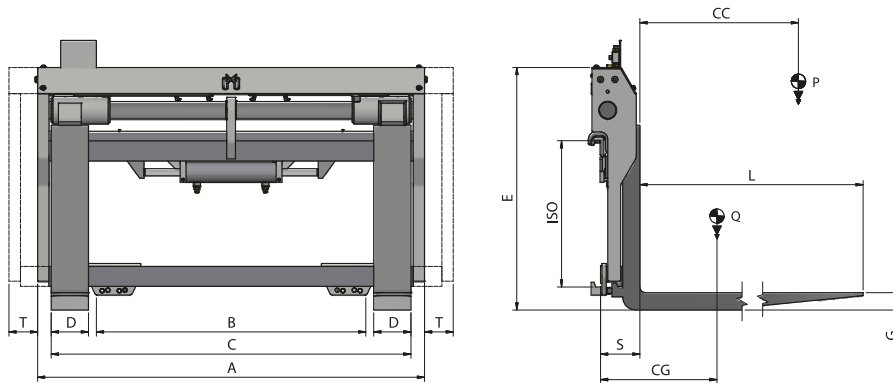

Hydraulic functions: 2 | Max working pressure: 110 Bar

Features:

- Differentiated Cylinders for a constant and synchronised movement of the forks.
- Sliding on the pin for particularly demanding use.
- Pressure Relief Valve.

Special Equipment:


- Special widths and/or openings.
- Custom made Forks.
- Load Backrest.
- Check valve for barrel grabbing.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Minimum Fork Carriage	Opening Range		Forks	Height	Stroke	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	B (mm)	C Min (mm)	C Max (mm)	DxGxL (mm)	E (mm)	T (mm)	S (mm)	CG (mm)	Q (kg)
18UFA2A2009	2500	500	2a	980	800	395	905	120x40x1200	730	± 100	104	223	238
18UFA2A2003	2500	500	2a	1040	860	395	965	120x40x1200	730	± 100	104	220	242
18UFA2A2013	2500	500	2a	1150	970	395	1075	120x40x1200	730	± 100	104	215	248
18UH23A2001	3000	500	3a	1150	970	465	1085	120x45x1200	840	± 100	122	203	323
18ULL3A2003	5000	500	3a	1250	1070	475	1155	150x50x1200	840	± 100	127	222	409
18ULL3A2004	5000	500	3a	1350	1170	475	1255	150x50x1200	840	± 100	127	220	413
18ULL3A2017	5000	500	3a	1550	1370	475	1455	150x50x1200	840	± 100	127	210	437

Oil flow rate

ISO	(L/min)	
	↔	↕
2	15	15
3	15	20

- ↕ Shifting
- ↕ Opening
- ↕ Closing



Please refer to our catalogue for further Special Equipment