


107.2 Twin Sideshift

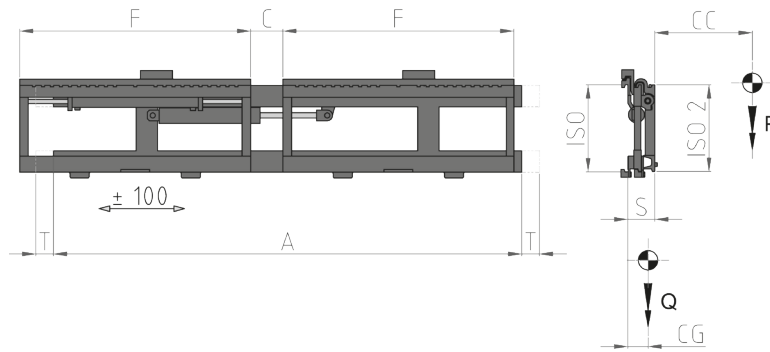

Hydraulic functions: 2 | Max working pressure: 200 Bar

Features:

- Handling of multiple pallets side by side.
- Handling of 2/4 pallets simultaneously, depending on the type of forks installed.
- Rear shifting structure with a connected fixed carriage and an additional shifting carriage.
- Easier and safer manoeuvres, even in narrow spaces.


Special Equipment:

- Special widths and/or strokes.
- Custom made Forks.
- Custom made Load Backrest.
- Load Stabiliser with custom made dimensions/openings.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width		Distance		Stroke	Thickness	Centre of Gravity	Weight
				A (mm)	F (mm)	C Min (mm)	C Max (mm)				
N°	P (kg)	CC (mm)	2328	A (mm)	F (mm)	C Min (mm)	C Max (mm)	T (mm)	S (mm)	CG (mm)	Q (kg)
15GFA2C3001	2500	500	2	1610	800	10	160	± 100	125	67	234
15GFA2C3002	2500	500	2	1980	980	10	220	± 100	125	68	276
15GHY7C3002	3500	500	3	1980	980	20	220	± 100	144	77	382
15GHY7C3003	3500	500	3	2080	980	100	300	± 100	144	80	390

Oil flow rate	
ISO	(L/min)
2	15
3	15

↔ Shifting



Please refer to our catalogue for further Special Equipment