


## 676 Fork Positioner with Integral Sideshift

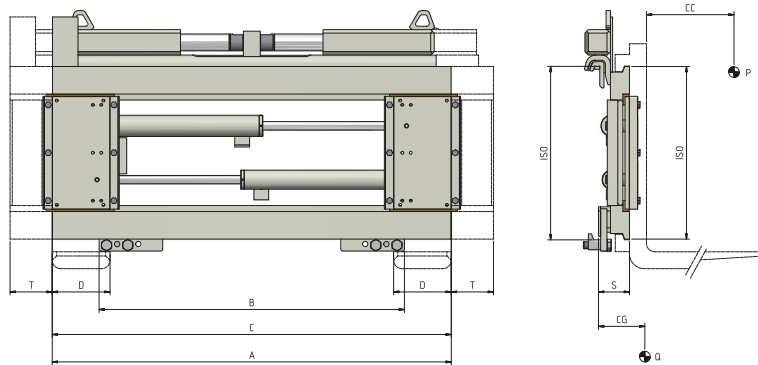

Hydraulic functions: 2 | Max working pressure: 80 Bar

### Features:

- Differentiated Cylinders for a constant and synchronised movement of the forks.
- Fast and accurate lifting and positioning of loads.
- Pressure Relief Valve.
- Recommended use of forks with max length 1500 mm.
- Adjustable plates for use of forks with different sections.
- Reduced damage to pallets and goods.
- Easier manoeuvres even in narrow spaces.


### Special Equipment:

- Special widths and/or openings.
- Standard Forks.
- Load Backrest.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Minimum Fork Carriage	Opening Range		Fork Width	Stroke	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	B (mm)	C Min (mm)	C Max (mm)	D (mm)	T (mm)	S (mm)	CG (mm)	Q (kg)
17TLL3C2004	5000	500	3	1500	1080	430	1500	150	± 100	80	46	202
17TLL3C2005	5000	500	3	1560	1150	430	1560	150	± 100	80	46	205
17TLL3C2006	5000	500	3	1660	1250	430	1660	150	± 100	80	46	210
17TR04C2009	8000	600	4	1420	1200	560	1420	200	± 100	94	49	313
17TR04C2013	8000	600	4	1600	1300	560	1600	200	± 100	94	50	374
17TR04C2011	8000	600	4	1800	1600	560	1800	200	± 100	94	50	383
17TR04C2012	8000	600	4	2000	1700	560	2000	200	± 150	94	50	409

Oil flow rate		
ISO	(L/min)	
	↔	↕
3	15	20
4	18	45

↕ Shifting  
↕ Opening  
↕ Closing



Please refer to our catalogue for further Special Equipment